




i-Touch V10

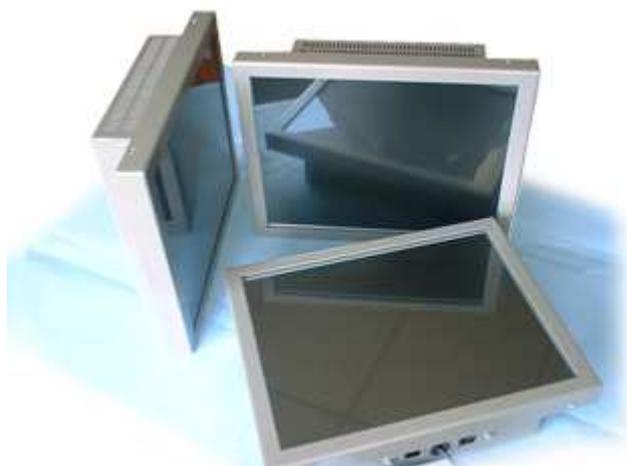

Flexible 15" Touch screen kiosk module with 1GHz VIA

This attractive Kiosk, compact in design can be supplied as shown, to be vesa mounted on a desk stand or wall bracket. Its main feature is that it can be separated into two halves for clamping to our lit edge plastic or other materials of your choice.

The v10 is a stylish, minimalist kiosk. Designed to be non intrusive this unit, pictured on the left, has the class and style to fit into both classic and modern styled locations, fitting in beautifully with the surrounding decor. Its design means that the front section can be attached to material of your choice (up to 50mm thick), with the component cables running directly through the material via a single holes to the rear PC section located behind. The two parts are then secured and held firmly in place.

Physical Specifications

<i>Dimensions (WxHxD)</i>	TBA x TBA x TBA	<i>Operating Environment</i>	-25 to 40 Degress
<i>Weight</i>	TBA	<i>Audio</i>	2 + 2 Watts
		<i>RTB Warranty</i>	1 Year
		<i>Build Material</i>	Powder Coated Steel and Plexiglass
		<i>Fixing Details</i>	TBA

<i>Manufacturer</i>	Future Generation	<i>Controller Model</i>	Titan TTN3-ADA-LQ150X1LGN2
<i>Viewing Angle</i>	TBA	<i>Colours</i>	16.7 Million
<i>Control Type</i>	OSD	<i>Contrast</i>	350:1
<i>Resolution</i>	1024x768	<i>Brightness</i>	260 Cd
<i>Cable Connector</i>	15 pin D-Sub / Dvi	<i>Backlight</i>	35,000 Hours Typical

Power Specifications

<i>Power Supply</i>	210-240 Volt AC
<i>Power Consumption</i>	40 Watts Normal
<i>Power Rating</i>	80 watts

PC Specifications

<i>Processor</i>	VIA 1GHz or Pentium	<i>Memory</i>	256mb
	M 1.6GHz		
<i>Hard Disc Drive</i>	40Gb		

Special Comments

Meets DDA Requirements



i-Touch V10 Pictures

